

Hydraulic Ramp Trailers

Model SR 35 and 50 ton capacity



- Full width gooseneck
- Outside hydraulic controls for easy operation
 - Load carrying rear ramp for loading from ground or dock
 - Available in 35 ton and 50 ton capacities with 2 and 3 axles.




Heavy duty Etnyre folding tail design.



Etnyre custom designed tiedowns and optional stake pockets.



Optional winch built into gooseneck slope.

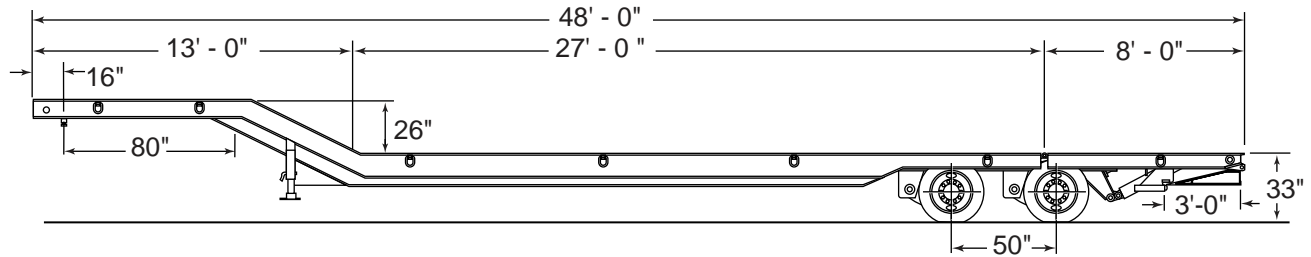


SR35TL/T1

SR50TL3/T1 (requires 3 axles, same overall length)

Heights and clearances are approximate and refer to a loaded trailer.

- **35 and 50 ton capacity**
- **Full width gooseneck for extra load space. 90° drop or sloped approach.**
- **Outside hydraulic controls for easy operation.**
- **Load carrying hydraulic rear ramp for loading from the ground or dock. 58" high dock loading capability.**

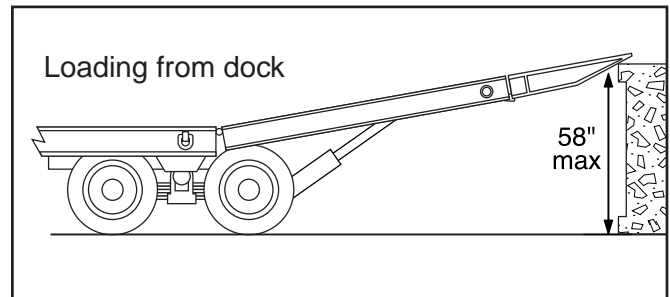

STANDARD EQUIPMENT

Capacity:

Distributed 35 ton. Concentrated 30 ton in 10'-0"

Distributed 50 ton. Concentrated 45 ton in 10'-0"

Four beam frame construction.

Gooseneck: Full width with wood decking.

Tool box in gooseneck.

Landing Legs: Telescopic drop legs.

Platform width: 8'-6".

1 1/2" Apitong decking.

Covered wheel wells, 1/4" steel floorplate.

Lash rings: 7 per side. Bent style.

Easy access hydraulic controls.

Load carrying hydraulic rear ramp (50% of the payload in center of ramp).

Load ramp: 8'-6" wide x 11'-0" long.

Main ramp: 8'-6" wide x 8'-0" long. Wood decked.

Approach ramp: 8'-6" wide x 3' long (1/4" steel floor plate).

Ramp lock: Compression blocks.

Suspension: Air Ride.

Axles: Two (2) 22,500# (5/8" wall).

Oil lubricated wheel bearings.

Wheels: Ball seat hubs with steel disc wheels.

Tires: 235/75R 17.5 (H) radial.

Air brakes: 12 1/4" x 7 1/2".

ABS: 2S/2M system.

Lights and reflectors, 12 volt sealed beam rubber mount.

Paint: black, red or yellow enamel.

OPTIONAL EQUIPMENT

Additional gooseneck length.

Additional gooseneck fifth wheel height.

Additional platform length.

Additional platform width.

14° hydraulic ramp (platform to gooseneck) 8'-6" wide.

14' long x 8'-6" wide 10.5° load ramp (same overall length). 10' main ramp. 4' approach ramp.

Traction bars on rear ramps.

Steel floorplate on rear main ramp.

2" Apitong decking.

Additional lash rings.

Stake pockets.

Extension brackets, 12" swing type. Set for 2" plank.

Two speed landing gear.

20,000# line pull hydraulic winch with 100 ft. of 9/16" cable and hook.

12,000# hydraulic winch cable, 7/16", 100 ft.

Power pack: 9, 13 or 18 HP (gas) air cooled with 12 volt electric start.

Single point spring suspension.

Special tires.

Additional toolbox.

Special paint.

Auxiliary crossmember on 12" centers (recommended for fork lift applications).

NOTE: Etnyre trailers conform to applicable motor vehicle safety standards in effect on date of manufacture. E.D. Etnyre Co., whose policy is one of continuous improvement, reserves the right to change specifications without notice. Some items shown in photos and illustrations may be optional equipment.



E. D. ETNYRE & CO.

1333 S. Daysville Road, Oregon, Illinois 61061

Phone: 815/732-2116 or 800/995-2116 Fax: Sales 815-732-7400

Email: sales@etnyre.com Web Site: www.etnyre.com

L-SR-00
supersedes L-SR-93